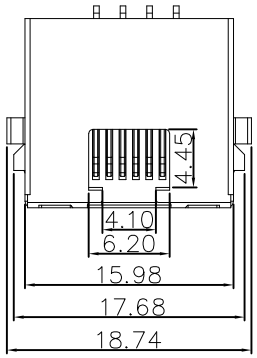

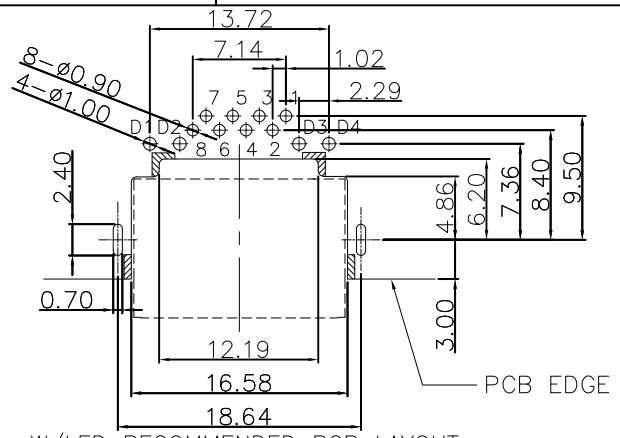

W/LED RECOMMENDED PCB LAYOUT

COMPONENT SIDE(t=1.6mm, tol:±0.05)

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.25mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell: Alloy ,Nickel Plating
Fork:Alloy

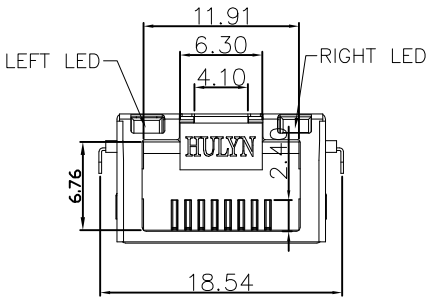

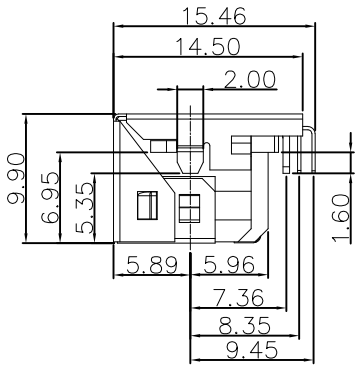



3D VIEW

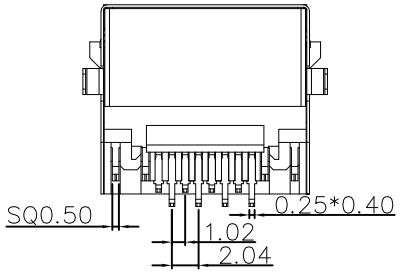



LED ELECTRICAL CHARACTERISTIC



LEFT LED RIGHT LED

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness

REV	DESCRIPTION.	APPD.	Date
A0	RELEASED	Peng	02/08-17

HULYN

深圳惠興力電子有限公司
SHEN ZHEN HUILY ELECTRONICS CO.,LTD.

FILE NO : HR60(Series)

TOLERANCE(公差) :
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

TITLE 圖名	Shielded RJ45 Modular Jack,Through Hole Type,With LED Offset H9.90 SinkH2.95			UNIT 單位	mm inch
PART NO. 料號	HR6081S-1188N14B-L11-1R			SCALE 比例	1 : 1
DRAWN BY 製圖	Peng	DATE 日期	2017-08-02	REV. 版本	A.0
CHECKED BY 審核	Zhu	DATE 日期	2017-08-02		

Page：1of 1

HTTP://www.huilyn.com