
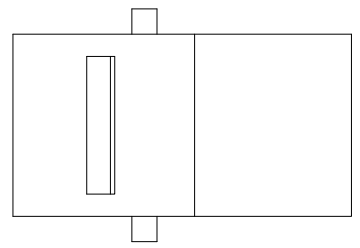

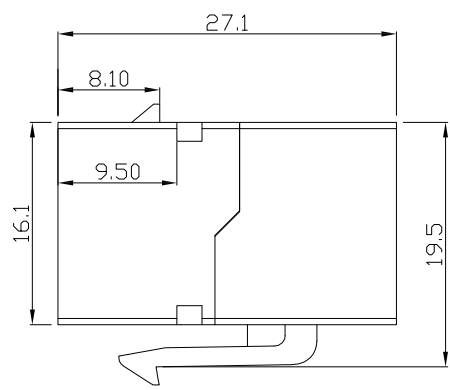


L K J I H

3

4

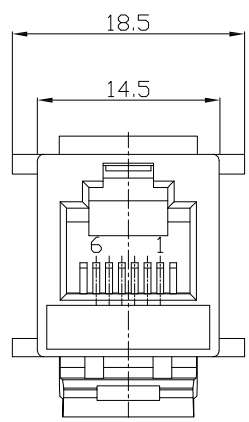

NOTES

MATERIAL
 1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
 3. PLATING : GOLD 6U" PLATING OVER NICKEL IN CONTACT.
 4. SHIELD : COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL
 1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
 5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL
 1. DURRABILITY : 750 CYCLES MIN.
 2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL :
 1. STORAGE : -40°C~+85°C.
 2. OPERATION : -40°C~+85°C..

HTTP://www.hulyn.com

2

1

6

HULYN 深圳惠興力電子有限公司
 SHEN ZHEN HUILY ELECTRONICS CO.,LTD.

A0	RELEASED	Peng	02/08-17
REV	DESCRIPTION.	APPD.	Date

FILE NO : HR512Z(Series)		TITLE 圖名		卡扣直通帶邊 6P6C 扁針6u"金		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		HR512Z-66N41B-1R		SCALE 比例	1:1
		DRAWN BY 製圖		Peng	DATE 日期	2017-08-02	REV. 版本
		CHECKED BY 審核		Zhu	DATE 日期	2017-08-02	